



1. Packing List

1. VL101-12880YL-C13 LVDS Display Touch Panel x1
2. LVDS Cable x1
3. I²C TOUCH CABLE x2

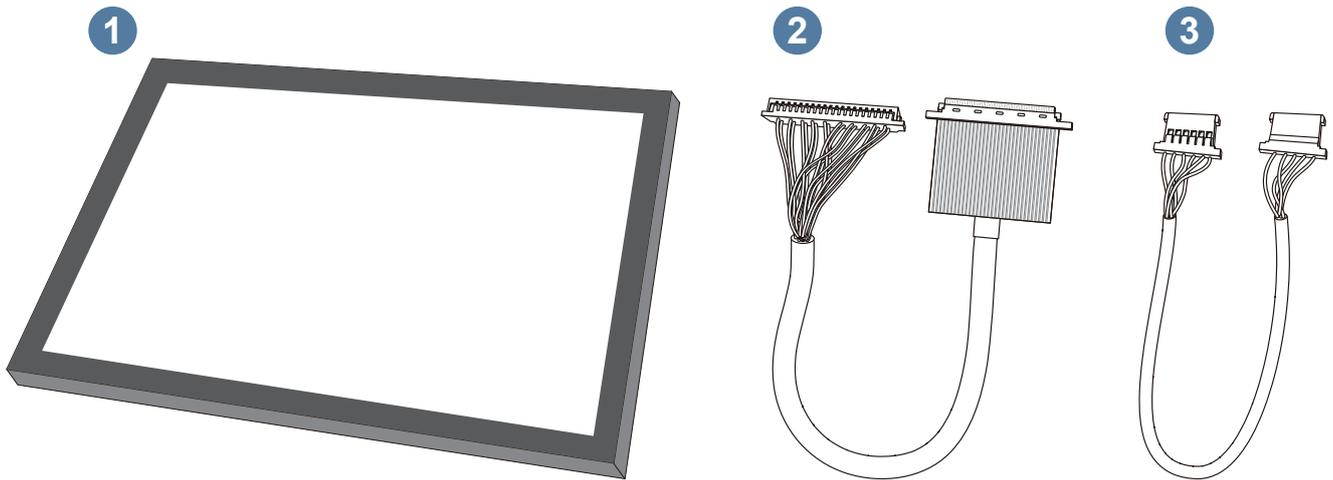

2. Connect Your LVDS Panel

1. Connect the attached LVDS cable to the LVDS connector on the rear panel of the display.
2. Connect the attached I²C touch cable to the I²C slot on the rear panel of the display.

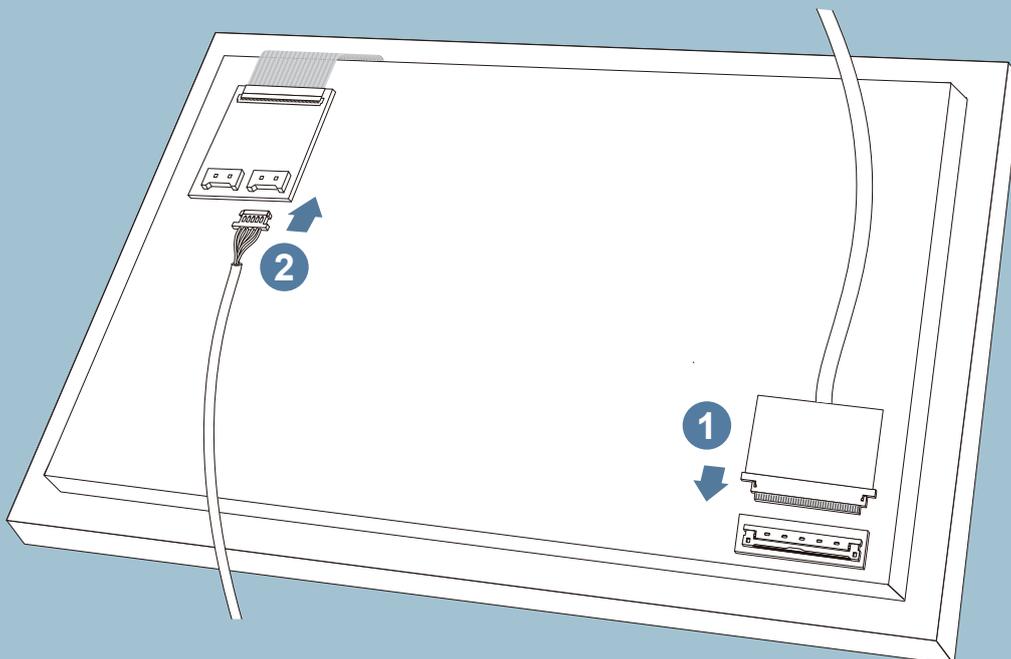



3. Adjust the Settings of the Evaluation Kit

- Adjust the voltages (J2, SW10, and Sw11) refer to the tables and illustrations below. By default, all the dip switches are set to the down position and the jumper is set to open.

Jumper	Description
Jumper J2	Pin 1-3 Closed
	Pin 2-4 Closed

Dip Switch	Description
SW10	Pin 1-8, Pin 3-6 Up Position
	Pin 2-7, Pin 4-5 Down Position

Dip Switch	Description
SW11	Pin 1-4 Up Position
	Pin 2-3 Down Position

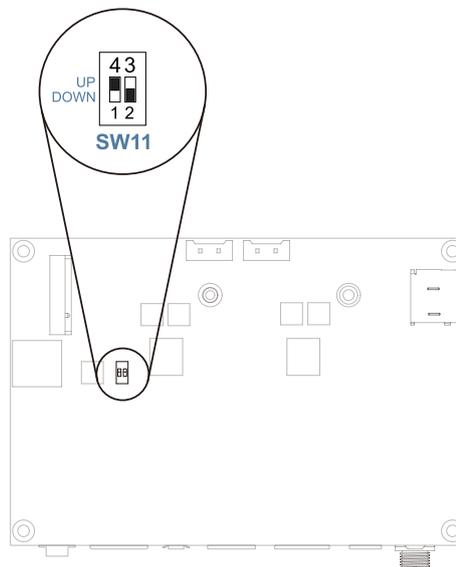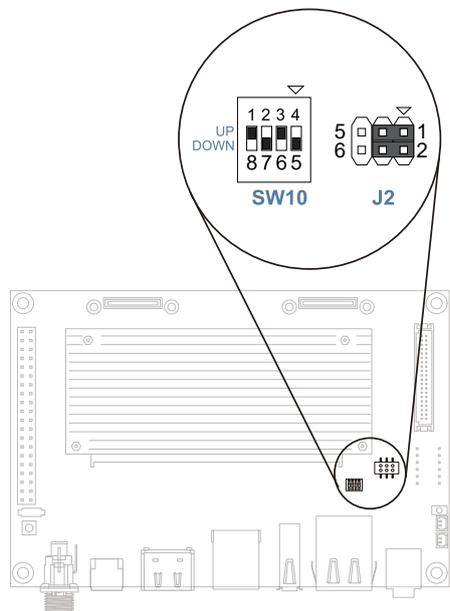

4. Connect the LVDS Display to the Evaluation Kit

- Connect the LVDS cable from the display to the LVDS connector on the front side of the evaluation kit.
- Connect the I²C touch cable from the display to the I2C slot on the rear side of the evaluation kit.
- Use the 12V/2A power adapter with a 2.1mm x 5.5mm plug connector to power the evaluation kit.

