

- onsemi AR0821 8MP Rolling Shutter Sensor
- 4K HDR Imaging Capabilities
- Designed for Low Light Applications
- S-Mount for Interchangeable Lenses
- GMSL2™ (Gigabit Multimedia Serial Link) interface
- FAKRA Z-Code Automotive Connector
- Plug & Play with Linux OS & Yocto
- VizionViewer™ configuration utility
- VizionSDK for custom development







#### **Camera Information**

CMOS Sensor	onsemi AR0821
Active Pixels	3848 (H) x 2168 (V) = 8 MP
Pixel Size	2.1 μm x 2.1 μm
Illuminated Type	Back Side Illuminated (BSI)
Maximum S/N Ratio	41.8 dB
Optical Format	1/1.7" (Diagonal 9.25 mm)
Shutter Type	Rolling Shutter
Chromaticity	Color
LIDD Commont	
HDR Support	Yes
Maximum Frame Rate (YUV422-UYVY)	Yes 3840 x 2160 @ 15 fps 2560 x 1440 @ 30 fps 1920 x 1080 @ 60 fps 1280 x 720 @ 60 fps 640 x 480 @ 60 fps

### **Camera Interface**

Serial Link	GMSL2
Serializer	MAX96717
Connector	FAKRA SMB Jack Z-Code

#### **Power**

Power over Coax	10.8V - 26.4V
Power Consumption	3840 x 2160 @ 15 fps ≤ 1.6W
Standby Power	≤ 0.1W Standby

# **Software Support**

Platform Support	NVIDIA Jetson AGX Orin NVIDIA Jetson Orin Nano / NX NVIDIA Jetson Xavier NX NVIDIA Jetson Nano NXP i.MX95
Operation System	Linux Yocto
Software	VizionViewer™
Development SDK	VizionSDK


## **Environmental and Mechanical**

Dimensions	24.5(W) x 24.5(H) x 34.4(D) mm
Weight	≤ 25 grams
Operating Temperature	-30°C to + 70°C


## **Certification and Compliance**

Certification	Compliant with CE / FCC / RoHS /
	REACH directives

# **Spectral Characteristics**

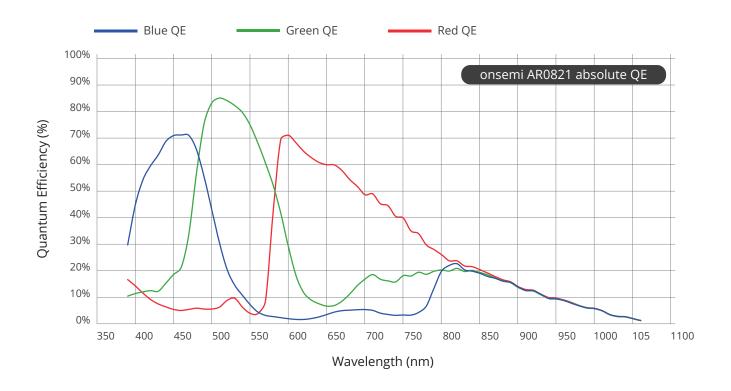


# **Block Diagram**

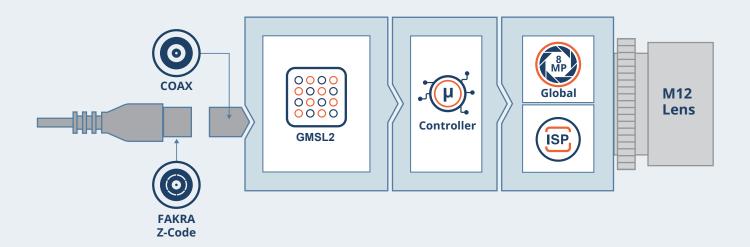



# **Dimensions** (units in mm)

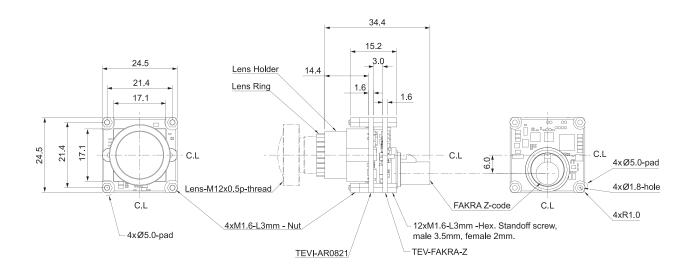

# **Order Information**

## UVLS-GM2-AR0821-x-Sxx-xx-xxxx

Option	Code	Description
Chromaticity	С	Color
	M	Monochrome
Lens	S44	S-Mount Module D-FOV 44°
	S74	S-Mount Module D-FOV 74°
	S119	S-Mount Module D-FOV 119°
	S156	S-Mount Module D-FOV 156°
Filter	-	-
	IR	IR Cut Filter 650nm
Custom ID	XXXX	Custom Part number ID for customized Software loader and special component (BOM)

For customization, please contact your TechNexion sales representative.

# **Optional Accessories**

An easy to attach A-Mount bracket for TechNexion 30mm enclosed cameras.







245-MOUNT-BRACKET on tripod (tripod not included)



For more information:



sales@technexion.com

# **Custom Lens Solutions**









UVLS-GN	12-AR0821	-C-S44-IR	Lυ

UVLS-GM2-AR0821-C-S74-IR UVLS-GM2-AR0821-C-S119-IR UVLS-GM2-AR0821-C-S156-IR

Fixed Focus	Fixed Focus	Fixed Focus	Fixed Focus
12 mm	6 mm	3 mm	3.2 mm
F2.0	F2.8	F2.0	F2.0
44.0° ± 5%	74.4° ± 5%	118.8° ± 5%	156.0° ± 5%
38.3° ± 5%	67.1° ± 5%	110.7° ± 5%	137.2° ± 5%
21.6° ± 5%	40.8° ± 5%	75.4° ± 5%	79.4° ± 5%
23.09 mm	28.6 mm	29.56 mm	44.98 mm
5.06 mm	8.8 mm	4.85 mm	6.14 mm
0.15 m	0.1 m	0.3 m	0.3 m
<2%	<0.50%	<-5%	<-32%
650 nm	650 nm	650 nm	650 nm
	12 mm F2.0 44.0° ± 5% 38.3° ± 5% 21.6° ± 5% 23.09 mm 5.06 mm 0.15 m <2%	12 mm 6 mm F2.0 F2.8 44.0° ± 5% 74.4° ± 5% 38.3° ± 5% 67.1° ± 5% 21.6° ± 5% 40.8° ± 5% 23.09 mm 28.6 mm 5.06 mm 8.8 mm 0.15 m 0.1 m <2% <0.50%	12 mm 6 mm 3 mm  F2.0 F2.8 F2.0  44.0° ± 5% 74.4° ± 5% 118.8° ± 5%  38.3° ± 5% 67.1° ± 5% 110.7° ± 5%  21.6° ± 5% 40.8° ± 5% 75.4° ± 5%  23.09 mm 28.6 mm 29.56 mm  5.06 mm 8.8 mm 4.85 mm  0.15 m 0.1 m 0.3 m  <2% <0.50% <-5%

# **GMSL2 Frame Grabbers**

The ease of usage, benefits and integration of a GMSL camera in embedded systems is often made complex by the lack of GMSL ports and connectors on the system. For those scenarios TechNexion developed a range of framegrabbers that easily plug into a USB port and extend the system with 1 to 4 GMSL interconnects.



#### 1-4 Port

Connect up-to 4 GMSL cameras to a single USB port on your x86 or Arm based system.



#### **Software**

Linux and Windows systems are supported.



### **UVC Compliant**

Fully plug-n-play in Windows and Linux embedded systems.



#### VizionViewer™

Easy to use software utility providing you with granular camera settings control.



#### Autodetect

Zero configuration required to detect any specific TechNexion GMSL camera by the framegrabber.



#### **VizionSDK**

Hardcode and control your cameras with C# and Python code.









