


## **AXON Series**

System on Modules



# AXON System on Module Series

The AXON Module Family offers a scalable, compact form-factor System-on-Module using four 80-pin board-to-board Hirose connectors for embedded systems. Designed for vibration-prone environments, AXON modules deliver powerful processing, industrial-grade reliability, and secure mechanical integration — making them ideal for drones, robotics, vehicle vision systems, and edge computing applications.

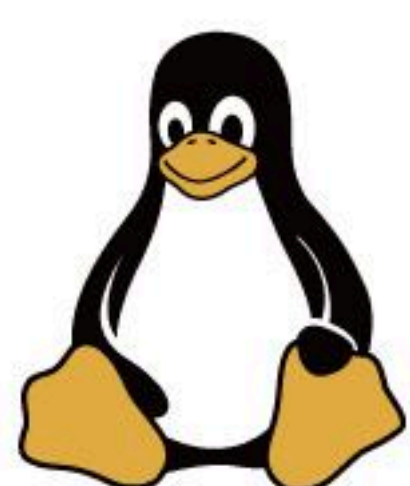

yocto  
PROJECT



## Key Highlights



### Faster Time to Market

A complete design that is ready to deploy assists you to focus on application from day one. Helping you to bring products to your customers much faster.



### Longevity

15+ years availability from the start of production ensuring the same product to be available during the lifetime of your embedded project.



### Scalable and Pin-Compatible

A complete family stretching multiple generations of SOC technology enabling true scalability and futureproof your design.



### Sourcecode Software

Yocto Linux, Debian or Android sourcecode can be easily obtained from our github account for seamless development.



### Comprehensive Interface

Packed with versatile interfaces, including serial ports, CAN bus, I2C, SPI, and USB, for diverse connectivity.



### Pre-Certified Wi-Fi

Pre-certified wireless options simplify design and reduce costs for end-device certifications.



### Camera-Ready

Seamless integration with TechNexion vision modules — built for machine vision, robotics, and edge AI from day one.



### Online Technical Help

Provides expert resources and guidance to streamlined development and integration.


Don't see what you are looking for ? Talk to us.



# SOM Family Comparison: AXON vs. EDM vs. PICO

Feature	AXON	EDM	PICO
Connector	4*80-pin Hirose connectors	260-pin Edge connectors	70-pin Hirose connectors
Size	58 x 37 mm	69.6 x 35 mm	37 x 40 mm
Key Advantages	Interface Superset	Low-cost single connector	Smallest size
Applications	<ul style="list-style-type: none"><li>• Edge Computing</li><li>• Vehicle vision applications</li><li>• Drone / UAV / Robotics</li></ul>	<ul style="list-style-type: none"><li>• General Embedded</li><li>• Edge AI / Vision Applications</li><li>• Smart manufacturing</li></ul>	<ul style="list-style-type: none"><li>• Small compact embedded devices</li><li>• Vibration prone applications</li><li>• Low-power mobile applications</li></ul>

## Deliver your embedded system to market faster because...

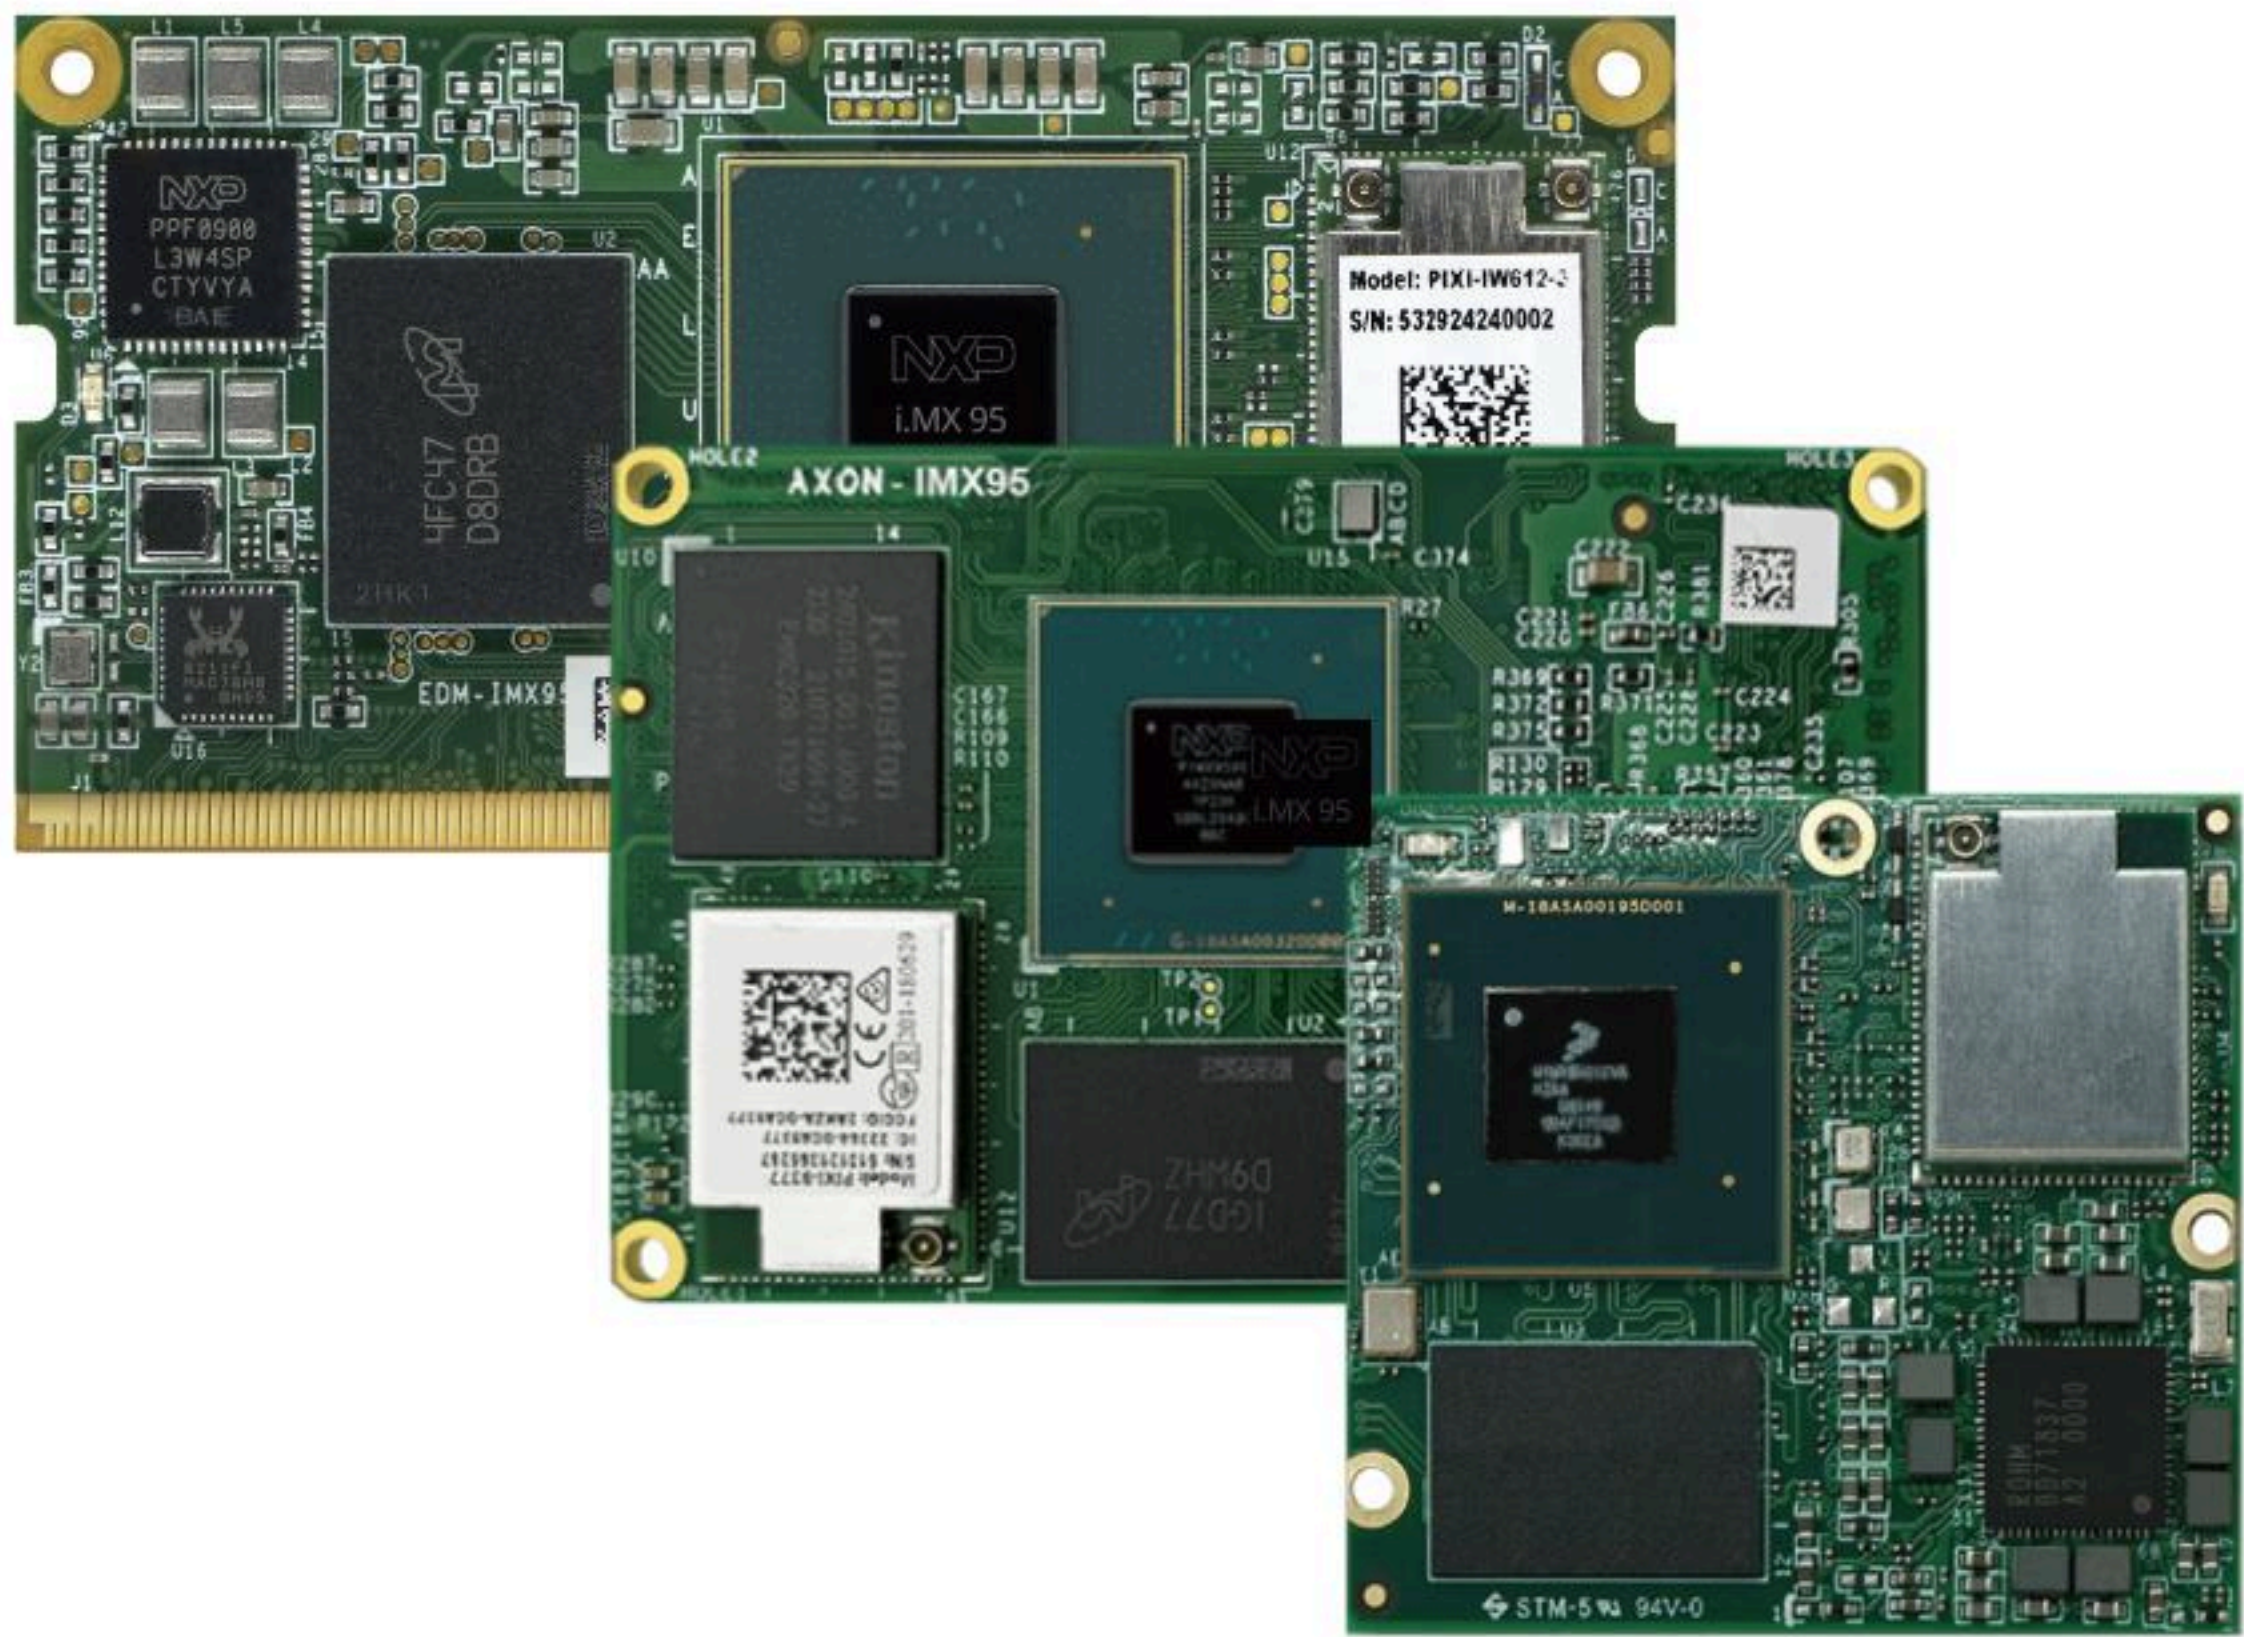

- ✓ Readily available evaluation kits
- ✓ Source code Software
- ✓ Online Support (resources and manuals)
- ✓ Schematic and design reviews for Carrier board design
- ✓ Short lead-time delivery
- ✓ Pre-certified Wireless / Bluetooth





Overview



	AXON-IMX8M-PLUS		AXON-IMX91		AXON-IMX93		AXON-IMX95	
Core System								
Processor	NXP i.MX8M Plus		NXP i.MX91		NXP i.MX93		NXP i.MX95	
Architecture	ARM Cortex-A53 + M7		Arm Cortex-A55		ARM Cortex-A55 + M33		6 x ARM Cortex-A55 + M33 + M7	
PMIC	NXP PCA9450		NXP PF9453		NXP PF9451		NXP PPF0900 NXP PPF5302 NXP PPF5301	
Memory	Up to 8GB LPDDR4		2GB LPDDR4		Up to 2GB LPDDR4x		Upto 16GB LPDDR5	
Storage	32GB eMMC (default)		32GB eMMC (default)		32GB eMMC (default)		32GB eMMC (default)	
Debug Interface	JTAG / UART		UART		JTAG / UART		JTAG / UART	
AI / Vision Capabilities								
AI / ML	NN Accel 2.3 TOPS				NPU Ethos U-65 0.5 TOPS		2.0 TOP/s NPU (1GHz)	
Camera	2 x ISP up to 12 MP resolution, Dual MIPI CSI-2 (4 lane)				MIPI CSI-2 (2 lanes)		Up to 8 cameras with MIPI virtual channels	
Connectivity								
Network LAN	1x Realtek RTL8211		2x Realtek RTL8211		2x Realtek RTL8211		1x Realtek RTL8211	
Wi-Fi	Qualcomm Atheros QCA9377 Wi-Fi 5 – 802.11 a/b/g/n/ac (optional)		NXP IW416 Wi-Fi 4 – 802.11 a/b/g/n (optional)		NXP IW416 Wi-Fi 4 – 802.11 a/b/g/n (optional)		NXP IW611 Wi-Fi 6 – 802.11 a/b/g/n/ac/ax (optional)	
Bluetooth	Qualcomm Atheros QCA9377 Bluetooth (optional)		NXP IW416 Bluetooth (optional)		NXP IW416 Bluetooth (optional)		NXP IW611 Bluetooth (optional)	
Antenna	MHF4 connector (optional)		MHF4 connector (optional)		MHF4 connector (optional)		MHF4 connector (optional)	
Signaling								
	HDMI LVDS LAN MIPI CSI MIPI DSI PCIe USB USB OTG I²S	SDIO CAN UART SPI I²C PWM GPIO JTAG	TTL RGB LAN USB 2.0 I²S CAN UART	I²C SDIO GPIO TAMPER ADC	LVDS TTL RGB MIPI DSI MIPI CSI-2 LAN USB 2.0 I²S	CAN UART I²C SDIO PWM GPIO	LVDS MIPI CSI-2/DSI MIPI CSI-2 LAN MDI PCIe (Gen3) USB 3.0 USB 2.0 I²S PDM S/PDIF	CAN UART SPI I²C SDIO PWM GPIO JTAG RGMII USXGMII I³C
Video								
GPU Engine	GC520L (2D) Vivante GC7000UL				PXP - Hardware Compositor		Arm Mali-G310 Graphic Processing Unit 3D GPU supporting 50 GFLOPs FP32 OpenGL® ES 3.2 Vulkan® 1.3, OpenCL 3.0	
Video Decode	1080p60 H.265, H.264, VP9, VP8						4Kp30 H.265, H.264	
Video Encode	1080p60 H.265, H.264						4Kp30 H.265, H.264	
Audio								
Audio Codec	On carrier board		On carrier board		On carrier board		On carrier board	
Audio Interface	I²S (2 channel)		I²S		I²S		I²S	
Operation Systems								
Standard Support	Linux, Yocto, Android, Ubuntu/Debian		Linux, Yocto		Linux, Yocto, Debian		Linux, Yocto, Debian	
Extended Support	Commercial Linux							
Mechanical								
Dimensions	58 (W) x 37 (H) x 5.07 (D)mm		58 (W) x 37 (H) x 5.05 (D)mm		58 (W) x 37 (H) x 5.05 (D) mm		58 (W) x 37 (H) x 5.1 (D) mm	



# Starter Kits that Deliver

Proof of concept within a day. It's possible with TechNexion's System on Module Starter kits that bring all bits of hardware to the table. Backed up with demo Yocto Linux and Debian pre-installed on your evaluation kit and take literally a minute to boot after you receive your kit on your doorstep.

Need a touch display or a camera solution, You can easily add these to the kit and software driver is already made available, assisting you quickly with your proof of concept validation steps.




# Embedded Vision Made Easy

Integration of Embedded vision camera sensors in your system with TechNexion SOMs is made easy with the TechNexion unified camera driver that comes pre-installed and packaged with your TechNexion System-on-Module.

All TechNexion Embedded Vision products are supported with VizionViewer and VizionSDK, giving your engineering team full control over the camera settings by using C# or Python.

Learn more about TechNexion MIPI CSI-2 Sensors online or ask your Sales Representative for a consultation how we can help you.

< 2 MP	5 MP	8 MP	10 ~ 20 MP
 <b>AR0144</b> Global Color	 <b>AR0521</b> Rolling Color	 <b>AR0821</b> Rolling Color	 <b>AR1335</b> Rolling Color
 <b>AR0145</b> Global Mono	 <b>AR0522</b> Rolling Color/Mono	 <b>AR0822</b> Rolling Color/Mono	
 <b>AR0234</b> Global Color		 <b>AR0830</b> Rolling Color/Mono	
 <b>AR0235</b> Global Mono			

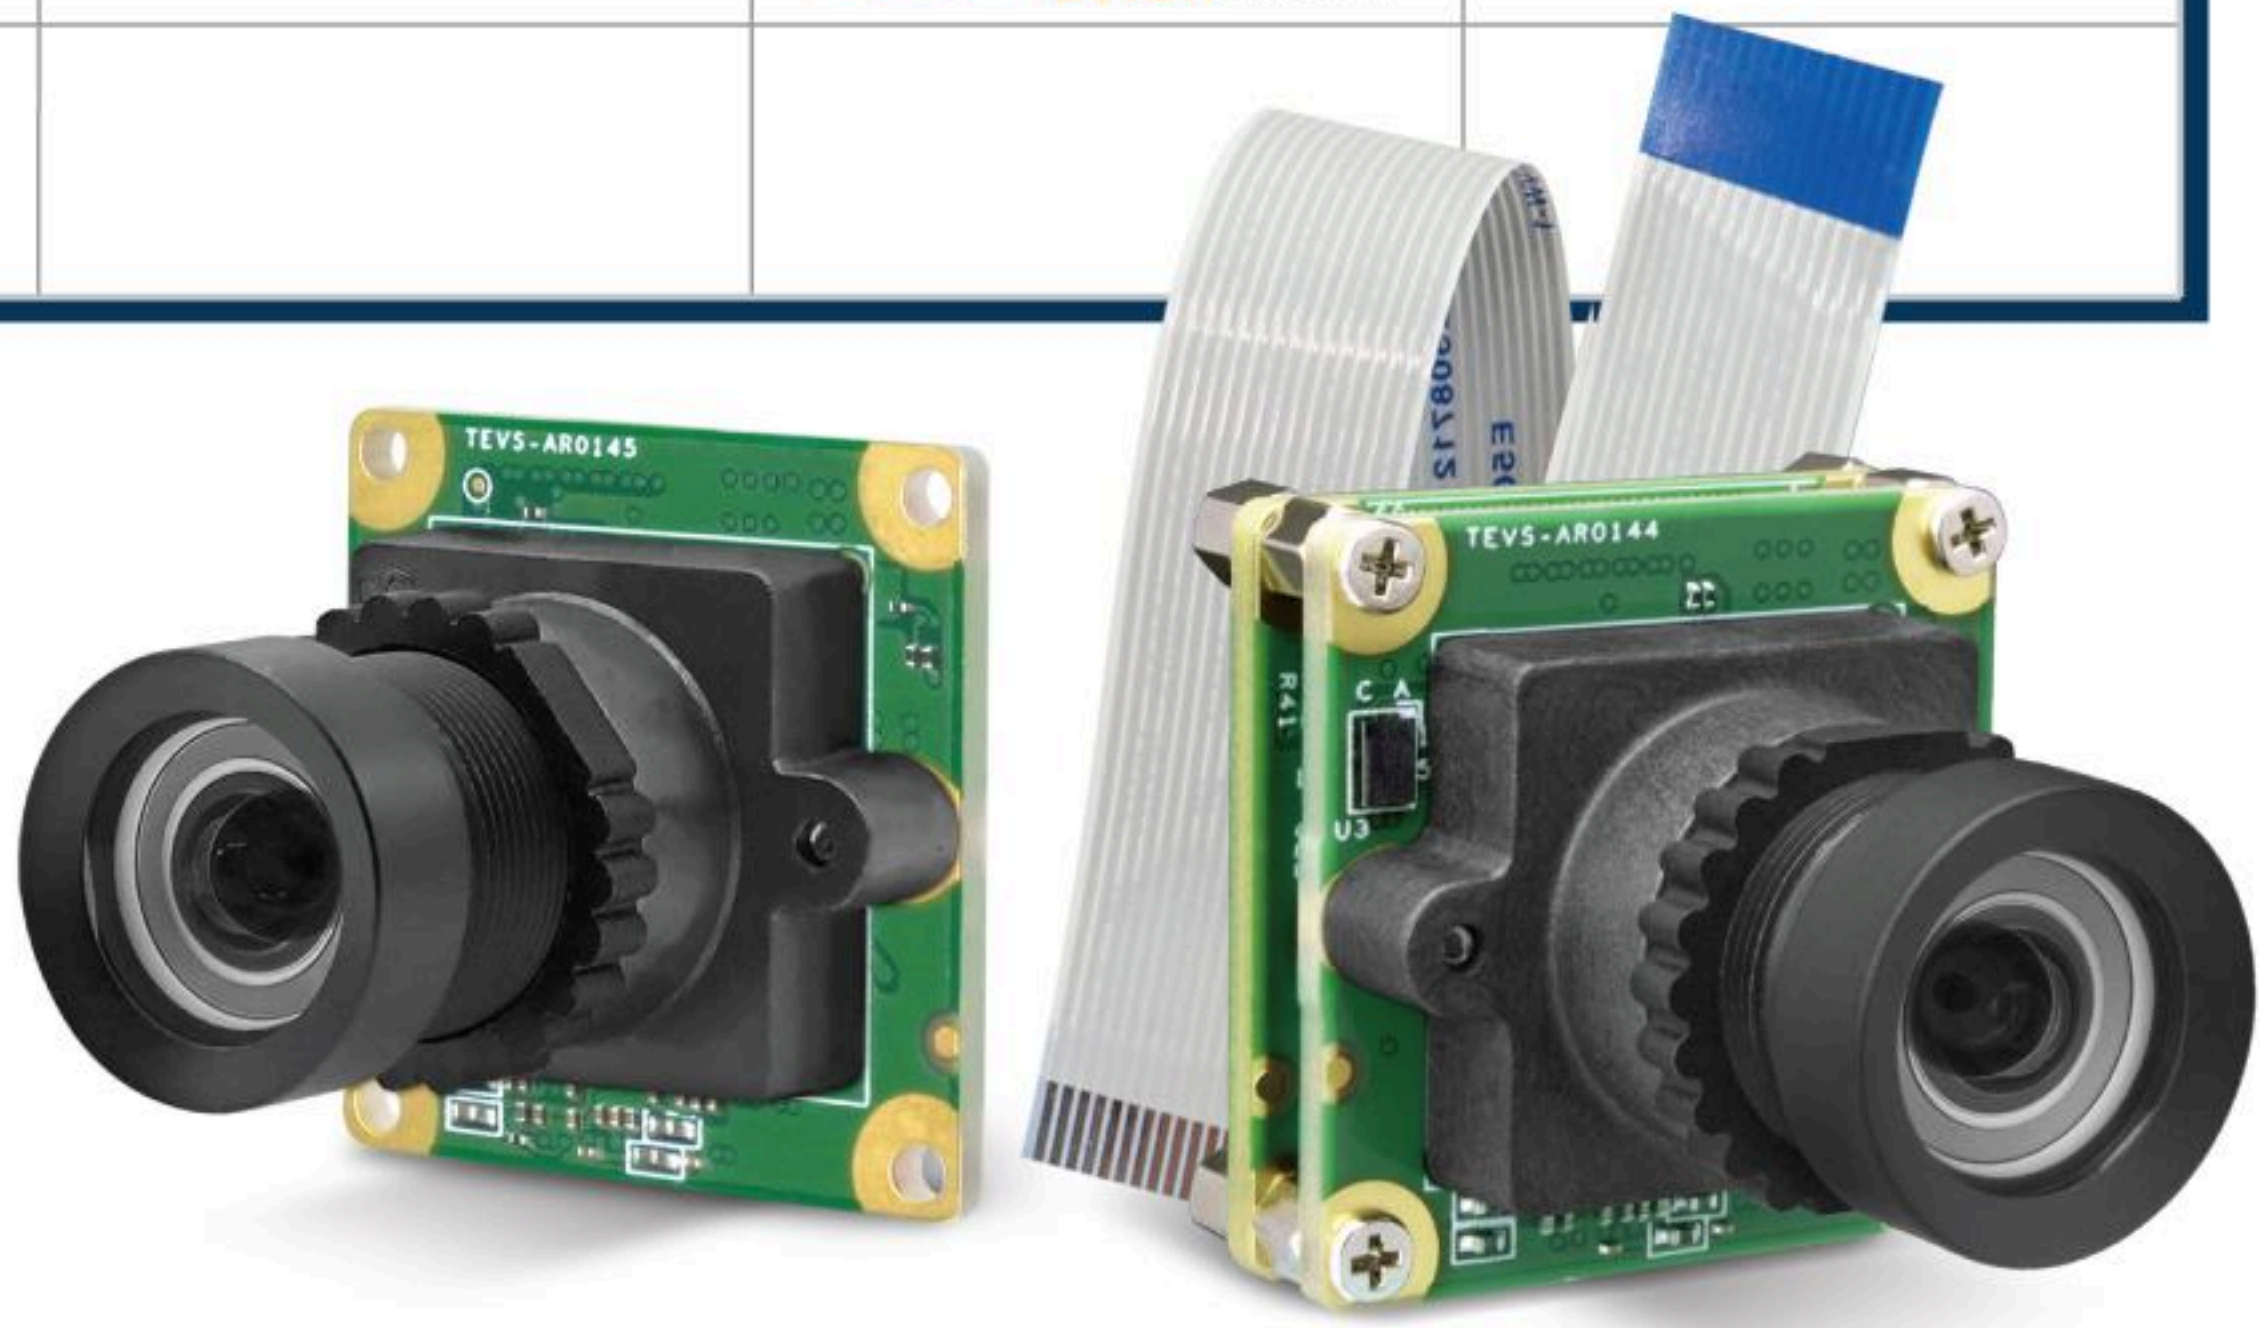

VizionSDK



VizionViewer™

