VLS-GM2-AR0144-CB

- onsemi AR0144 1MP Global Shutter Sensor
- Captures high-speed dynamic targets clearly within an ultra-short exposure time.
- C-Mount for Interchangeable Lenses
- GMSL2[™] (Gigabit Multimedia Serial Link) interface
- FAKRA Z-Code Automotive Connector
- Plug & Play with Linux OS & Yocto
- VizionViewer[™] configuration utility
- VizionSDK for custom development



VizionViewer™

VizionSDK

echNexion INNOVATORS OF TECHNOLOGY

Camera Information

CMOS Sensor	onsemi AR0144
Active Pixels	1280 (H) x 800 (V) = 1 MP
Pixel Size	3.0 μm x 3.0 μm
Illuminated Type	Front Side Illuminated (FSI)
Maximum S/N Ratio	38 dB
Optical Format	1/4" (Diagonal 4.5 mm)
Shutter Type	Global Shutter
Chromaticity	Color
Maximum Frame Rate (YUV422-UYVY)	1280 x 800 @ 60 fps 1280 x 720 @ 60 fps 640 x 480 @ 60 fps
Output Format	YUV422-UYVY RGB888 / RGB565 RAW8 / RAW10 / RAW12

Software Support

Platform Support	NVIDIA Jetson AGX Orin NVIDIA Jetson Orin Nano / NX NVIDIA Jetson Xavier NX NVIDIA Jetson Nano NXP i.MX95
Operation System	Linux Yocto
Software	VizionViewer™
Development SDK	VizionSDK

Environmental and Mechanical

Dimensions29.5(W) × 29.5(H) × 33.3(D) mmWeight≤ 40 gramsMTBF50,000 HoursShock15G half-sine 11 ms durationVibration1 Grms random 5-500Hz hr/axisRelative Humidity10 to 90 %Operating Temperature-30°C to + 70°C		
MTBF50,000 HoursShock15G half-sine 11 ms durationVibration1 Grms random 5-500Hz hr/axisRelative Humidity10 to 90 %	Dimensions	29.5(W) x 29.5(H) x 33.3(D) mm
Shock15G half-sine 11 ms durationVibration1 Grms random 5-500Hz hr/axisRelative Humidity10 to 90 %	Weight	≤ 40 grams
Vibration1 Grms random 5-500Hz hr/axisRelative Humidity10 to 90 %	MTBF	50,000 Hours
Relative Humidity 10 to 90 %	Shock	15G half-sine 11 ms duration
, ,	Vibration	1 Grms random 5-500Hz hr/axis
Operating Temperature -30°C to + 70°C	Relative Humidity	10 to 90 %
	Operating Temperature -30°C to + 70°C	

Certification and Compliance

Certification	Compliant with CE / FCC / RoHS /
	REACH directives


Camera Interface

Serial Link	GMSL2
Serializer	MAX96717
Connector	FAKRA SMB Jack Z-Code


Power

Power over COAX	10.8V - 26.4V
Power Consumption	1280 x 800 @ 60 fps ≤ 0.9W
Standby Power	≤ 0.1W Standby

Spectral Characteristics

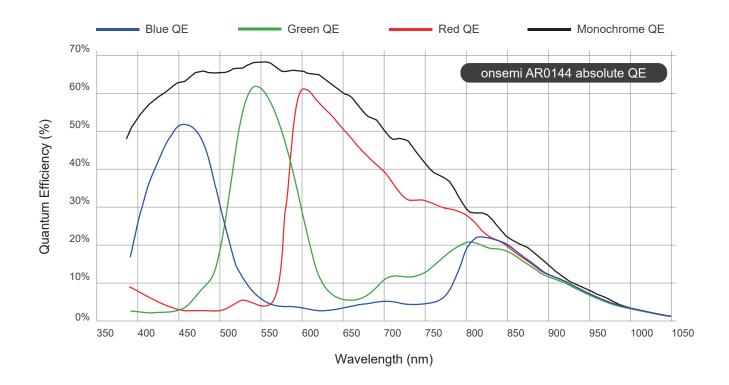

Block Diagram

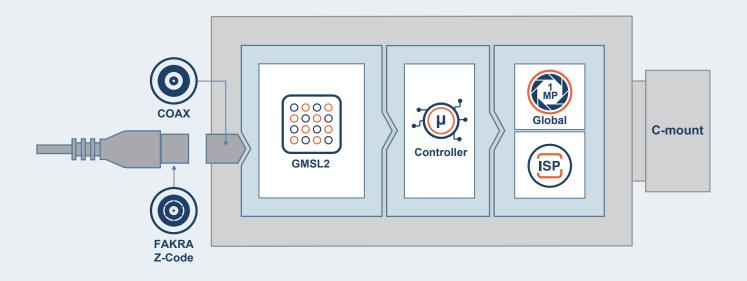




For more information: www.technexion.com sales@technexion.com

2025-04-11 - All specifications are subject to change without notice. © TechNexion - All rights reserved worldwide.

Dimensions (units in mm)

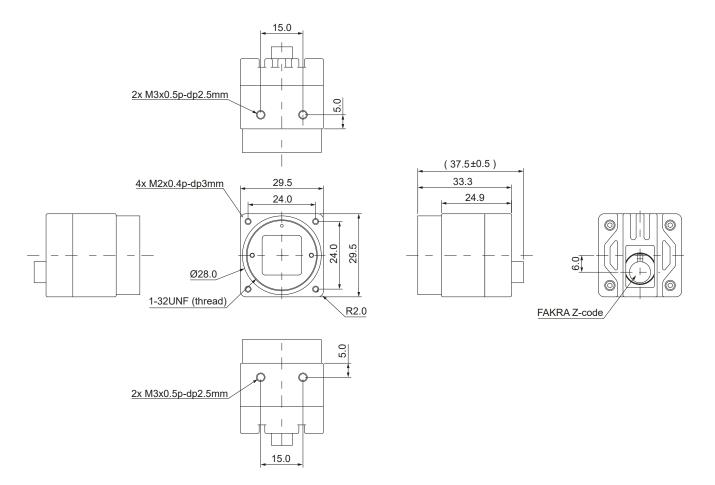

Order Information

VLS-GM2-AR0144-x-CB-xx-xxxx

Option	Code	Description
Chromaticity	С	Color
Filter	-	-
	IR	IR Cut Filter 650nm
Custom ID	XXXX	Custom Part number ID for customized Software loader and special component (BOM)

For customization, please contact your TechNexion sales representative.

Optional Accessories

An easy to attach A-Mount bracket for TechNexion 30mm enclosed cameras.



300-MOUNT-BRACKET



300-MOUNT-BRACKET on tripod (tripod not included)



For more information: www.technexion.com sales@technexion.com

2025-04-11 – All specifications are subject to change without notice. © TechNexion – All rights reserved worldwide.

Custom Lens Solutions

Our C-mount cameras can be paired with a variety of off-the-shelf lenses. Customers are welcome to choose their own, or alternatively our engineers are on standby to assist with selecting the right camera lens for different applications.



GMSL2 Frame Grabbers

The ease of usage, benefits and integration of a GMSL camera in embedded systems is often made complex by the lack of GMSL ports and connectors on the system. For those scenarios TechNexion developed a range of framegrabbers that easily plug into a USB port and extend the system with 1 to 4 GMSL interconnects.



1-4 Port

Connect up-to 4 GMSL cameras to a single USB port on your x86 or Arm based system.



UVC Compliant

Fully plug-n-play in Windows and Linux embedded systems.



Autodetect

Zero configuration required to detect any specific TechNexion GMSL camera by the framegrabber.



Software

Linux and Windows systems are supported.



VizionViewer™

Easy to use software utility providing you with granular camera settings control.



VizionSDK

Hardcode and control your cameras with C# and Python code.









2025-04-11 - All specifications are subject to change without notice. © TechNexion - All rights reserved worldwide.