





#### **Camera Information**

CMOS Sensor	onsemi AR0821
Active Pixels	3848 (H) x 2168 (V) = 8 MP
Pixel Size	2.1 μm x 2.1 μm
Illuminated Type	Back Side Illuminated (BSI)
Maximum S/N Ratio	41.8 dB
Optical Format	1/2" (Diagonal 9.25 mm)
Shutter Type	Rolling Shutter
Chromaticity	Color
HDR Support	Yes
Maximum Frame Rate (YUV422-UYVY)	3840 x 2160 @ 15 fps 2560 x 1440 @ 30 fps 1920 x 1080 @ 60 fps 1280 x 720 @ 60 fps 640 x 480 @ 60 fps
Output Format	YUV422-UYVY RGB888 / RGB565 RAW8 / RAW10 / RAW12

#### **Camera Interface**

Serial Link	FPD-Link III
Serializer	TI DS90UB953
Connector	FAKRA SMB Jack Z-Code

#### Power

Power over COAX	10.8V - 26.4V
Power Consumption	3840 x 2160 @ 15 fps ≤ 1.6W
Standby Power	≤ 0.1W Standby

#### **Software Support**

Platform Support	NVIDIA Jetson AGX Orin
	NVIDIA Jetson Orin Nano / NX
	NVIDIA Jetson Xavier NX
	NVIDIA Jetson Nano
	NXP i.MX95
	TI Sitara™ AM68 / AM69
	TI Jacinto™ TDA4VM / TDA4VH
Operation System	Linux
	Yocto
Software	VizionViewer™
Development SDK	VizionSDK


#### **Environmental and Mechanical**

Dimensions	29.5(W) x 29.5(H) x 33.2(D) mm
Weight	≤ 40 grams
MTBF	50,000 Hours
Shock	15G half-sine 11 ms duration
Vibration	1 Grms random 5-500Hz hr/axis
Relative Humidity	10 to 90 %
Operating Temperature	e -30°C to + 70°C


## **Certification and Compliance**

mpliant with CE / FCC / RoHS /
ACH directives

# **Spectral Characteristics**

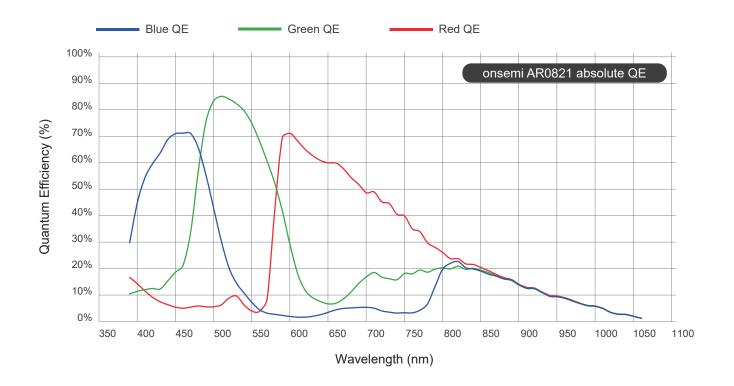


# **Block Diagram**

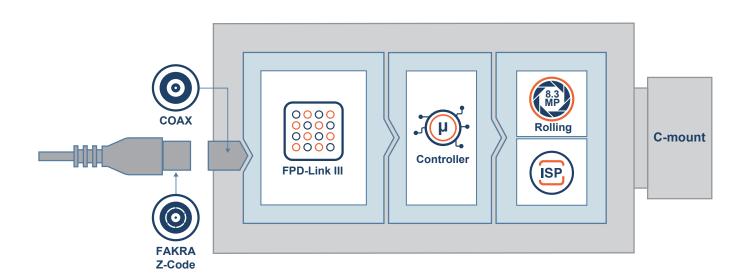



# **Dimensions** (units in mm)

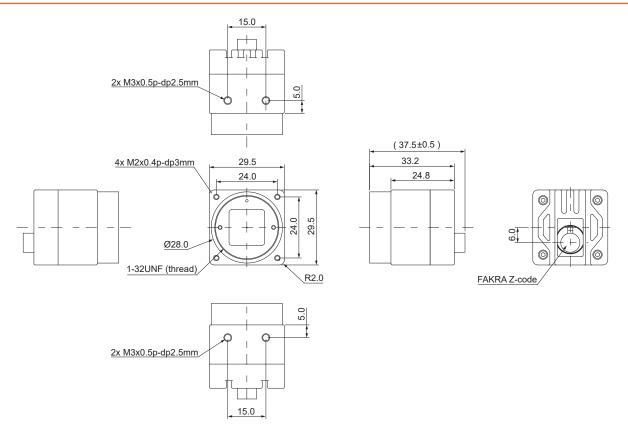

### **Order Information**

#### VLS-FPD3-AR0821-x-CB-xx-xxxx

Option	Code	Description
Chromaticity	С	Color
Filter	-	-
	IR	IR Cut Filter 650nm
Custom ID	xxxx	Custom Part number ID

For customization, please contact your TechNexion sales representative.

# **Optional Accessories**

An easy to attach A-Mount bracketfor TechNexion 30mm enclosed cameras.




300-MOUNT-BRACKET



300-MOUNT-BRACKET on tripod (tripod not included)





### **Custom Lens Solutions**

Our C-mount cameras can be paired with a variety of off-the-shelf lenses. Customers are welcome to choose their own, or alternatively our engineers are on standby to assist with selecting the right camera lens for different applications.







### **FPD-Link III Frame Grabbers**

The ease of usage, benefits and integration of a FPD-Link III camera in embedded systems is often made complex by the lack of FPD-Link ports and connectors on the system. For those scenarios TechNexion developed a framegrabber that easily plug into a USB port and extend the system with FPD-Link interconnect.



#### Up to 15m

Up to 15 meters of data and power transmission over a single COAX cable.



#### **Software**

Linux and Yocto systems are supported.



#### **UVC Compliant**

Fully plug-n-play in Windows and Linux embedded systems.



#### VizionViewer™

Easy to use software utility providing you with granular camera settings control.



#### **Autodetect**

Zero configuration required to detect any specific TechNexion FPD-Link camera by the framegrabber.



#### **VizionSDK**

Hardcode and control your cameras with C# and Python code.





